

Technical features:

- electric steel towel warmer radiator
- horizontal elements featuring with a 23 mm diameter
- side round manifolds with a 30 mm diameter
- the radiator is filled with a cooling liquid and is combined with a booster system of electric power of 1000 watts.

This blower system provides a temperature uniform with the room in which it is installed.

Price included:


- 4 adjustable wall fixing brackets in the same color of the radiator
- Wireless remote control

Finishes available	Surcharge
Standard White	
Classic finished	
Special finished	
Other RAL colors	

Finishing codes see page 596.



Available connection



right side manifold

Booster




MAIN CHARACTERISTICS OF AIR DIFFUSER

- ON/OFF switch
- Power supply 230 V 50 Hz, 1 ph
- Power installed = 1000 W
- Insulation: CLASS II
- Protection index: IP24
- Long electricity cable: 1.200 mm, SCHUKO plug
- Wireless remote control

FUNKY_S AIR


Electric

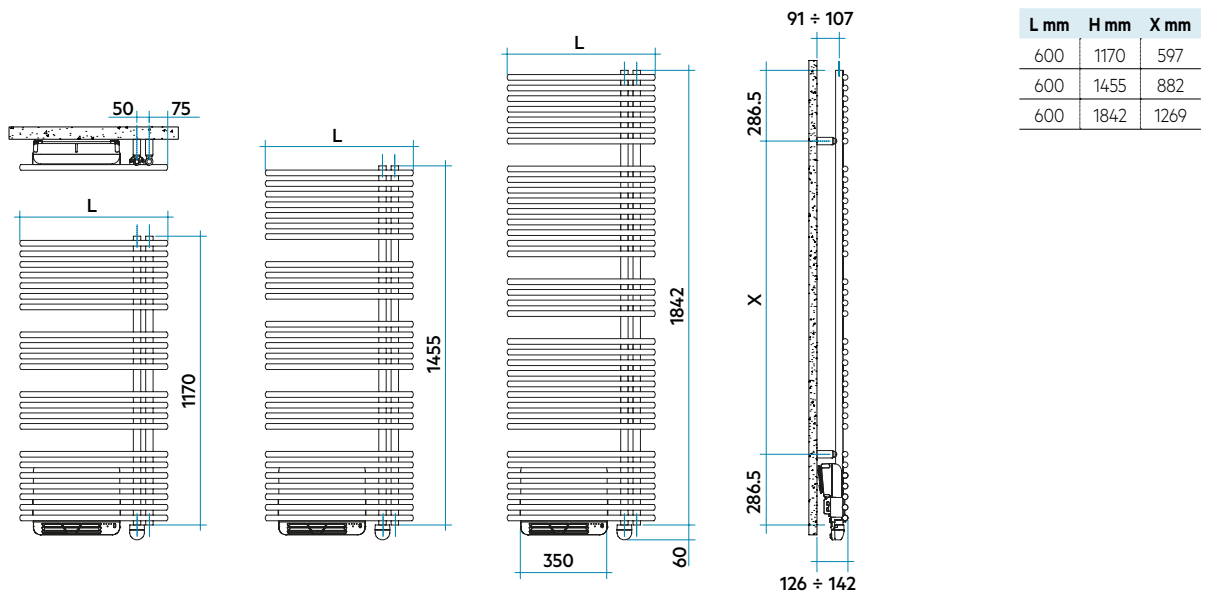

Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power Watt	Auxiliary heater
							with diffuser Watt
1170 22 rails 3 espaces	YBM060 Z 01 IR 01 NNN	122	1230	600	21,8	500	+ 1000
1455 27 rails 4 espaces	YBL060 Z 01 IR 01 NNN	122	1515	600	25,5	750	+ 1000
1842 36 rails 4 espaces	YBG060 Z 01 IR 01 NNN	122	1902	600	31,6	1000	+1000

The radiator will be supplied with the resistance always mounted on the inner collector.

Key Codes



Wireless Remote Control

FUNKY AIR ELECTRIC with wireless thermostat is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

Technical specifications

- Wireless communication via radio signals transmitted to the receiver connected to the system
- Radiofrequency communication pursuant to European standards
- Operating modes: Manual, Automatic, Comfort, Economy, Holidays
- You can activate 3 manual functions, automatic and holiday
- Can be set comfort temperature of 5°C to 30°C
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function

