



**NOVO CHROME-PLATED ELECTRIC**

height 1808 mm, length 750 mm. Chrome-plated finish (cod. 50).

**Technical features:**

- electric steel towel warmer radiator
- horizontal elements with round tubes 23 mm diameter
- side manifolds with a 40x30 mm semi-oval section
- complete with thermal liquid
- power cable, length 1200 mm, SCHUKO plug






**Price included:**


- 3 chela wall brackets

**Extension of Guarantee**


Irsap guarantees only the hydraulic seal of NOVO Chrome-plated ELECTRIC radiators for 10 years, starting from sales in 2009.

Finishes available	Surcharge
Chrome-plated (cod. 50)	

ELECTRIC HEATERS AVAILABLE			WIFI CONTROL *
<p><b>ELECTRIC HEATING ELEMENT WITH ON/OFF SWITCH (TYPE I)</b></p>  <p>Electric heating element with built-in ON/OFF switch. Insulation class: I. Protection index: IP54. The electronics are supplied in glossy chrome color.</p>	<p><b>ELECTRIC HEATING ELEMENT WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (TYPE K)</b></p>  <p>Electric heating element with 4-pole connector with electronic thermostat for regulating the temperature of the internal fluid. Insulation class: I. Protection index: IP44. The electronics are supplied in glossy chrome color.</p>	<p><b>ELECTRIC HEATING ELEMENT WITH IR ELECTRONIC CONTROL (TYPE H)</b></p>  <p>Digital electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP44. The electronics are supplied in glossy chrome color.</p> <p>ECO</p>	<p><b>ELECTRIC HEATING ELEMENT WITH WI-FI ELECTRONIC CONTROL (TYPE E)</b></p>  <p><b>Control your radiator remotely using the IRSAP NOW app available from:</b></p> <p>Available on the   GET IT ON Google Play</p> <p>Compatible with the systems:</p> <p>   Works with IFTTT</p> <p>WiFi electronic control for regulating the ambient temperature, programmable weekly. Insulation class: II. Protection index: IP24.</p> <p><b>* Available only for UE and CH.</b></p> <p>ECO</p> <p>View the online guides at: <a href="http://now.irsap.com">now.irsap.com</a></p> 

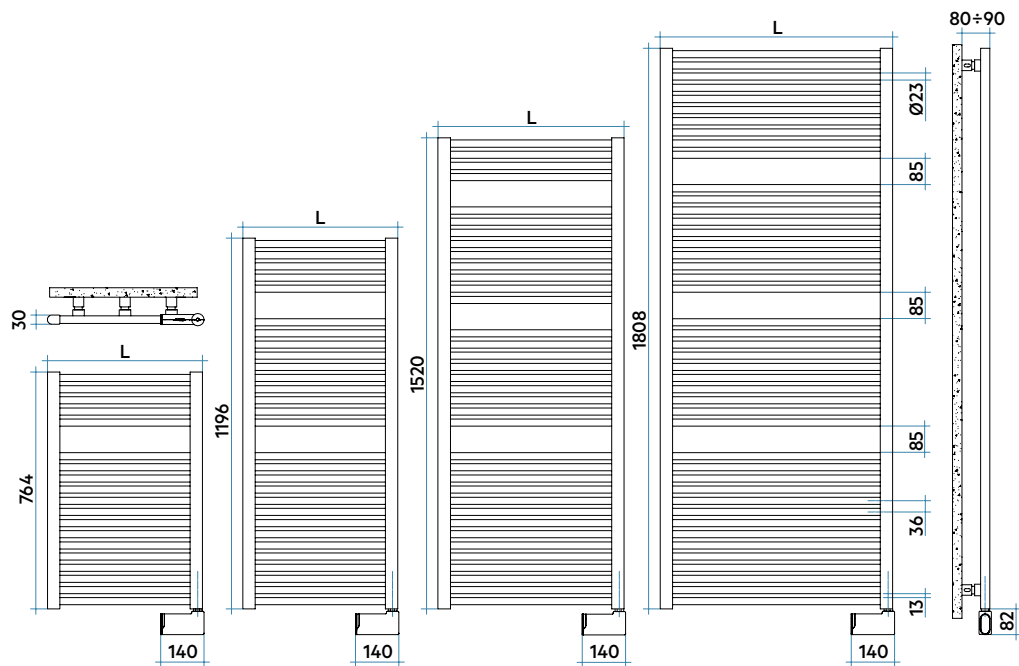


### NOVO CHROME-PLATED ELECTRIC WITH SWITCH (I)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
764 - 19 rails - 1 espace	<b>NLP050 I 50 IR 01 NNN</b>	30	764	500	10,2	<b>300</b>
1196 - 29 rails - 2 espaces	<b>NLM050 I 50 IR 01 NNN</b>	30	1196	500	15,4	<b>400</b>
1520 - 36 rails - 3 espaces	<b>NLL060 I 50 IR 01 NNN</b>	30	1520	600	22,2	<b>700</b>
1808 - 44 rails - 3 espaces	<b>NLG075 I 50 IR 01 NNN</b>	30	1808	750	37,6	<b>1000</b>

### NOVO CHROME-PLATED ELECTRIC WITH REGULATOR TO CONTROL THE INTERNAL TEMPERATURE OF THE FLUID (K)




Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
764 - 19 rails - 1 espace	<b>NLP050 K 50 IR 01 NNN</b>	30	764	500	10,5	<b>300</b>
1196 - 29 rails - 2 espaces	<b>NLM050 K 50 IR 01 NNN</b>	30	1196	500	15,9	<b>400</b>
1520 - 36 rails - 3 espaces	<b>NLL060 K 50 IR 01 NNN</b>	30	1520	600	23,1	<b>700</b>
1808 - 44 rails - 3 espaces	<b>NLG075 K 50 IR 01 NNN</b>	30	1808	750	33,7	<b>1000</b>

### NOVO CHROME-PLATED ELECTRIC WITH ELECTRONIC CONTROL (H)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
764 - 19 rails - 1 espace	<b>NLP050 H 50 IR 01 NNN</b>	30	764	500	10,4	<b>300</b>
1196 - 29 rails - 2 espaces	<b>NLM050 H 50 IR 01 NNN</b>	30	1196	500	15,7	<b>400</b>
1520 - 36 rails - 3 espaces	<b>NLL060 H 50 IR 01 NNN</b>	30	1520	600	22,5	<b>700</b>
1808 - 44 rails - 3 espaces	<b>NLG075 H 50 IR 01 NNN</b>	30	1808	750	38,0	<b>1000</b>

### NOVO CHROME-PLATED ELECTRIC WITH WI-FI ELECTRONIC CONTROL (E)



Model	Code	Depth P mm	Height H mm	Width L mm	Weight Kg	Electric Power
						Watt
764 - 19 rails - 1 espace	<b>NLP050 E 50 IR 01 NNN</b>	30	764	500	10,7	<b>300</b>
1196 - 29 rails - 2 espaces	<b>NLM050 E 50 IR 01 NNN</b>	30	1196	500	16,0	<b>400</b>
1520 - 36 rails - 3 espaces	<b>NLL060 E 50 IR 01 NNN</b>	30	1520	600	22,9	<b>700</b>
1808 - 44 rails - 3 espaces	<b>NLG075 E 50 IR 01 NNN</b>	30	1808	750	38,3	<b>1000</b>

#### Key Codes

